

# FINSEAL GLOW HD



## DESCRIPTION

Finseal Glow HD is a high solids solvent based high-gloss protective coating for a wide range of decorative paving and masonry surfaces requiring heavy duty protection.

Finseal Glow HD is recommended for application to stencilled, coloured, stamped concrete, exposed aggregate and is suitable for pedestrian and vehicle traffic such as driveways.

This very hard-wearing product has a good resistance to petrol, oil, hydraulic fluids, mould, algae and protects substrates from the ingress of dirt, grime and organic matter. It enhances the appearance and resists deterioration of the treated surface.

## USES

- Concrete pavements
- External driveways
- Stamped / patterned concrete
- Stencilled concrete
- Coloured concrete
- Pedestrian walkways
- Precast construction

## FEATURES AND BENEFITS

- Easy to apply
- Fast drying
- Protects against efflorescence
- Reduced surface weathering
- Enhanced concrete appearance
- Resistant to tyre marking
- UV resistant

## TYPICAL PROPERTIES

Resin Type	Acrylic 24% NVM
Specific Gravity	0.90
Viscosity	50-100cps
Film build (recommended)	120um @ 4m2/L
Thinning	Xylene
Recoat window	24 hours

## APPLICATION GUIDELINES

### Surface Preparation

Areas to be treated must be clean, dry, free from oil, grease and surface curing compounds.

### New Concrete

Freshly laid concrete should be left to cure for a minimum of 14 days prior to application, unless treated with Finseal Glow 24 same day sealer after finishing.

Remove all dirt, grease, oil, paint or curing compounds with Finseal Paveclean / TyreClean or suitable general-purpose cleaner or stripper. Thoroughly wash and pressure clean surface.

A light acid etch prior to application is recommended to ensure unreacted laitance is removed prior to applying to new stamped or exposed aggregate concrete.

Pressure clean surface at minimum 2000psi to prepare for sealing.

Allow surface to dry prior to application of the sealer.

### Existing unsealed concrete

Ensure surface is thoroughly prepared and dirt, grease, staining, oils and contaminants are removed with Fincare Paveclean / TyreClean followed by thorough scrubbing or pressure washing at minimum of 2000psi.

A light acid etch prior to application is recommended to ensure unreacted laitance and loose cementitious material is removed prior to sealing and increase penetration of the prime coat.

On 'tight' trowel finished concrete surfaces a heavier acid etch preparation may be required to increase penetration and adhesion of the material.

Pressure clean surface with a minimum 2000psi to prepare for sealing.

Allow surface to dry prior to application of the sealer.

### Previously sealed concrete

Ensure surface is thoroughly prepared and dirt, grease, staining, oils and contaminants are removed with Fincare Paveclean / TyreClean followed by thorough scrubbing or pressure washing at minimum of 2000psi.

Assess any existing sealer is sound, free of delamination and surface whitening. Undertake a cross hatch pull off test to a small area to assess adhesion of existing coating for further sealing.

If the existing sealer is unsuitable it is recommended that this be completely stripped off prior to new sealer being applied.

If sound, the existing sealer should be reactivated via application of Finseal Glow 100 solvent and agitated with a solvent resistant broom. Allow to dry before commencing sealing.

### Sealer Application

Apply Finseal Glow HD with a solvent resistant spray unit, lambswool roller or broom.

A minimum of 2 coats must be applied as part of the sealing system.

Slowly stir the material until thoroughly mixed to ensure an even look and sealing properties.

### PRIMING:

#### • To resurfaced concrete

Apply Finseal Glow HD diluted 20% with Finseal Glow X Xylene to the resurfaced concrete and leave for minimum of 2 hours before applying second coat.

#### • To previously sealed concrete

Apply Finseal Glow HD diluted 20% with Finseal Glow X Xylene to the resurfaced concrete and leave for minimum of 2 hours before applying second coat.

#### • To New cured or existing unsealed concrete

Apply Finseal Glow PS - Primer / Sealer and allow to dry for minimum leave for minimum of 2 hours before applying top coat.

### Application Method

Apply sealer with solvent resistant spray unit, lambswool roller or brush at sufficient rate to achieve consistent coverage in even coats.

Pour material into a tray for application by roller or brush. If spraying,

ensure to back roll or broom out any puddles or uneven application areas.

#### Second Coat:

Apply the second coat in the opposite direction to the first without thinning.

Allow minimum of 2 hours between subsequent coats and a recoat window of 24 hours for chemical adhesion without further preparation.

### IMPORTANT

#### Application Conditions

Finseal Glow HD is not recommended for new uncured concrete as shrinkage of the concrete during the drying process may result in coating delamination and lead to whitening of the surface. It is recommended to use Finseal Glow 24 on new uncured concrete.

Curing times are dependent on surface and ambient temperatures.

Avoid applying in excessively hot or cold parts of the day with temperatures below 5°C or above 30°C as blooming or bubbling of the coating may occur. Application in excessively hot temperatures in direct sunlight is not recommended.

### SLIP RESISTANCE

Sealing of surfaces with smooth or very low profiles that have a low coefficient of friction may result in that surface being slippery when wet. Consideration needs to be given regarding slip resistance and the addition of non-skid additives such as Finpro AD50P to the final coat.

Be aware that as the coating wears, the slip reducing additive will also wear. Reapplication will be required to reinstate slip resistance.

### CURING TIME

Curing is dependent on the temperature. The sealer is usually touch-dry in approximately 30 minutes at 25°C.

Protect the sealed surface from rain, water and sprinkler systems for a minimum of 6 hours. Accessible to foot traffic after 24 hours and vehicle traffic after a minimum of 5 days.

### ESTIMATING DATA

Coverage is approximately 4–5m<sup>2</sup> per litre per coat. Theoretical coverage for a 2 coats application is approx. 40–50m<sup>2</sup> per 20 litre drum.

The properties of the substrate such as porosity and profile will influence the coverage rate and number of coats required.

### CLEAN UP

Clean tools and equipment thoroughly with clean Glow X Xylene.

### PACKAGING


20L metal pail

### SHELF LIFE

1 year in unopened, factory sealed container. Safely stored at temperatures between 5°C–35°C.

### SAFETY PRECAUTIONS

Always wear adequate personal protection during use including gloves, eye protection, overalls and appropriate mask. Apply in adequate ventilation. Refer to Material Safety Data Sheet for further safety information.

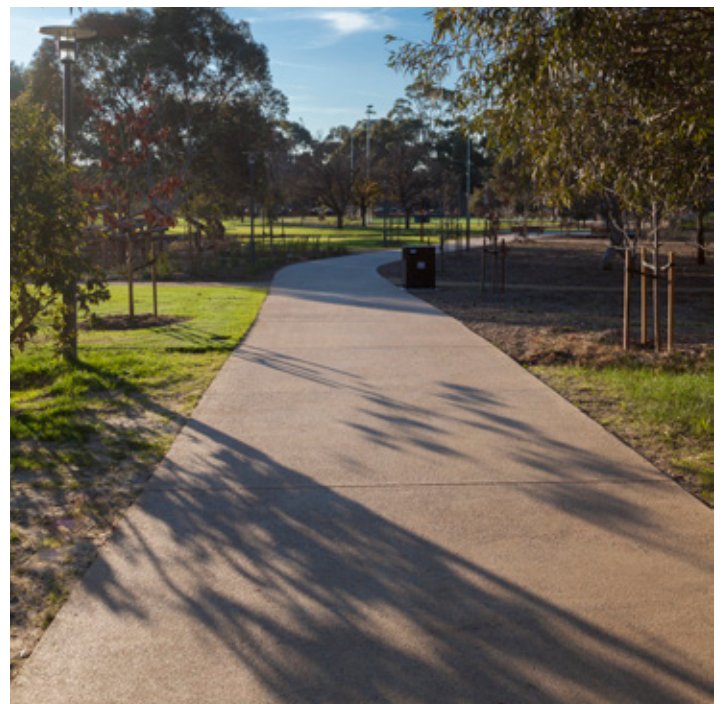

#### DISCLAIMER / STATEMENT OF RESPONSIBILITY

Purchase or use of the product referred above ('the Product') constitutes acceptance of these terms. Any information provided by Vulk Pty Ltd ('Vulk') is of a general nature and should not be taken as advice and is, to the extent permitted by law, provided without warranty as to the accuracy, reliability or completeness of that information. Further, no warranty is provided in respect to the quality, suitability or fitness for purpose of the Product. Expert advice should be taken in respect to any use of the Product.

So far as is permitted by law, any party purchasing or using the Product indemnifies Vulk against and releases Vulk from any claim, liability, loss, cost or similar directly or indirectly arising out of the supply or use of the Product or this technical data sheet. Vulk's liability to any party is limited to cost of replacement or repair of the Product and is reduced proportionately to the extent that an act or omission of any other party contributes to the liability.

**VULK.COM.AU**

enquiries@vulk.com.au

5 Piping Lane Lonsdale SA 5160

Phone: 08 7120 6955



VULK TDS Issue August 2019 Ver FSGHD.001